

CMX3A

Dedicated Screen 2 Controller

cinema

features

- ▶ Dedicated Screen 2 Controller
- ▶ 3 in 6 out for left centre right control
- ▶ Pre-set screen compensation equalisation

applications

- ▶ Control of Screen 2 active systems




The dedicated electronic controller CMX3A is a 3 in 6 out device designed to maximise performance of the Screen 2 active system.

Crossover frequencies, relative output levels, delay and screen compensated equalisation are all pre-set. Left, centre and right inputs are provided and there are low pass and high pass outputs for each channel.

technical specifications

MAINS SUPPLY	Captive 2m 3-core cable with moulded Schuko 2-pin plug with double earth contact
MAINS	Internally selectable by hard wire link 100-120/220-240v AC, VOLTAGE 50/60Hz. Mains voltage tolerance $\pm 10\%$ on each setting
MAINS FUSE	100-120V AC Fit 200mA Type T 220-240V AC Fit 100mA Type T
POWER CONSUMPTION	5 V.A.
INPUTS	20K ohms electronically balanced on M4 terminals
OUTPUTS	100R unbalanced on M4 terminals
SIGNAL + NOISE/NOISE RATIO	> 102dB @ 2V output
DISTORTION	1kHz 2V output 0.007% 100Hz 2V output 0.003%
DIMENSIONS	(W) 482mm x (H) 44mm x (D) 118mm (W) 19ins x (H) 1.75ins x (D) 4.6ins
WEIGHT	1.4kg (3lbs)

overall dimensions

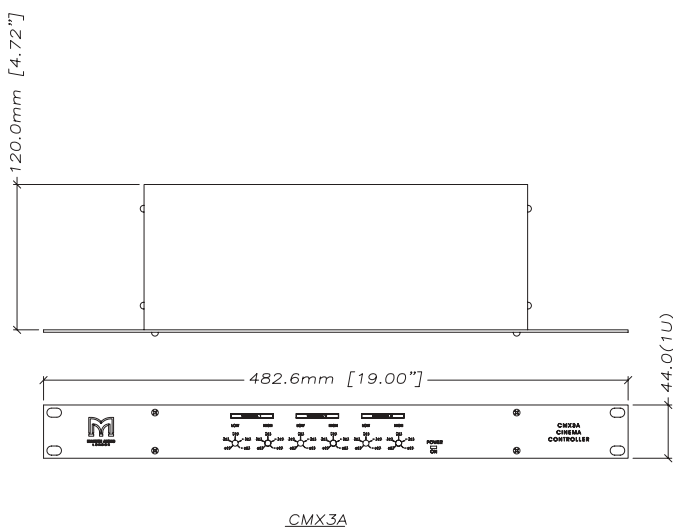

Century Point, Halifax Road, Cressex Business Park,
High Wycombe, Buckinghamshire HP12 3SL, England.
Telephone: +44 (0)1494 535312 Facsimile: +44 (0)1494 438669
E-mail: info@martin-audio.com
All information is Copyright © 2003 Martin Audio Ltd.



www.martin-audio.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>