

# MA9.6K

Lightweight, High Power, High Performance Power Amplifier


## features

- ▶ Worldwide mains operating voltage
- ▶ Power Factor Correction
- ▶ Over-temperature forecasting
- ▶ Thermal, short-circuit and overload protection
- ▶ Temperature controlled air cooling system
- ▶ Clip and permanent signal limiter
- ▶ Digital gain attenuation
- ▶ User selectable maximum output power
- ▶ User selectable maximum mains current draw
- ▶ PC remote control, monitoring and diagnostics

## applications

- ▶ Live sound reinforcement
- ▶ Fixed installations

The MA9.6K is one of three models extending the range of the renowned MA Series power amplifiers. The MA9.6K utilises the Pulse Width Modulation principal in combination with a high efficiency two stage switching power supply to deliver true class D operation with unparalleled sonic performance and hitherto unobtainable power delivery. The MA9.6K operates at an astonishing 95% efficiency virtually regardless of output power, occupies only 1U of rack space and is a mere 12kg (26.5lbs) in weight.

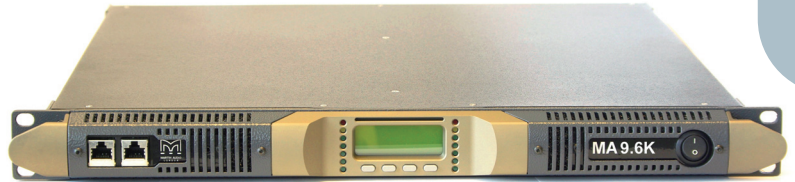

## technical specifications

### MAX OUTPUT POWER

EIA AT 1KHz AND 1% THD	
8Ω PER CHANNEL	1500W
4Ω PER CHANNEL	3000W
2Ω PER CHANNEL	4800W
16Ω BRIDGED	3000W
8Ω BRIDGED	6000W
4Ω BRIDGED	9600W

### DISTORTION

THD FROM 0.1W TO FULL POWER	< 0.05% (typically)
INTERMODULATION SMPTE	< 0.05% (typically)
INTERMODULATION DIM 30	< 0.05% (typically)
S/N RATIO	> 110dB (20Hz to 20KHz)
DAMPING FACTOR (8 ohm)	> 5000 (20Hz to 20KHz)

### OUTPUT IMPEDANCE

OUTPUT IMPEDANCE	60mΩ (User Selectable with KDSP option)
------------------	---

### SLEW RATE

50V/μs

### INPUTS

GAIN SELECTABLE (dB)	26, 29, 32, 35
----------------------	----------------

### FRONT PANEL

DISPLAY	Interactive LCD Matrix
INDICATORS	2 x Multi-function 7 segment LED Bargraph
MENU NAVIGATION	4 x Digital Push Button
NETWORK	2 x RJ45
DATA STORAGE & TRANSFER	Smart Card Reader

### REAR PANEL

INPUT CONNECTORS	Neutrik XLR / 6.3mm (0.25ins) Jack Combo
OUTPUT CONNECTORS	Neutrik Speakon
LINK SWITCH	Channel A-B Link
DATA PORT	RS485 Via RJ45


### POWER

OPERATION VOLTAGE	AC: 95-265V (50/60Hz)
-------------------	-----------------------

### DIMENSIONS

WIDTH	483mm (19ins)
HEIGHT	44mm (1.75ins) 1U
DEPTH	475mm (18.7ins)
WEIGHT	12kg (26.5lbs)

## overall dimensions

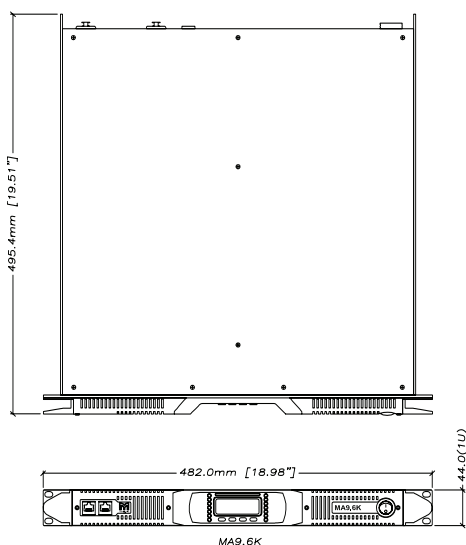

Century Point, Halifax Road, Cressex Business Park,  
High Wycombe, Buckinghamshire HP12 3SL, England.  
Telephone: +44 (0)1494 535312 Facsimile: +44 (0)1494 438669  
E-mail: info@martin-audio.com  
All information is Copyright © 2007 Martin Audio Ltd.



[www.martin-audio.com](http://www.martin-audio.com)

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>