


# HB2000

## 1M HomePNA Ethernet Adapter

---

### INTRODUCTION

The HB2000 is a HomeNet to Ethernet Bridge which connects any Ethernet device to a high speed access device or to a HomeNet LAN for Internet and Intranet access. This Bridge brings you the newest Ethernet compatible technology that uses the telephone wiring as the network's physical wiring thereby eliminating the need to install new wiring. It is designed to operate on the telephone wire installed in homes.

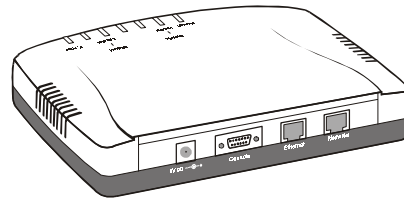

With this Bridge, every RJ-11 jack is Internet-Ready. Devices connected to this Bridge can share any high speed Internet access line-V.90, ISDN, cable, xDSL or wire-less modem.

This Bridge allows you to connect PCs and Ethernet enabled devices, such as Switch, HUB and printers, to a HomeNet LAN by simply plugging into the existing RJ-11 jacks. This Bridge's 1 Mbps throughput provides the bandwidth necessary to support existing networking applications such as application sharing, peripheral sharing and file sharing.

For providing a LAN networking solution, the Bridge acts as a high speed network access device for 1 Mbps Internet service that shares the existing telephone wire with POTS (Plain Old Telephone Service) service. This allows multiple PCs to access the Internet concurrently. The Bridge also distributes bandwidth within a customer premises that use V.90, ISDN, Cable, wire-less and xDSL modems to deliver high-speed access to the outside of the customer premises.

### FEATURES

- Plug and Play
- Protocol independent
- Stores and forwards switching architecture
- Link two LAN segments into a single logical network
- High-speed internet and intranet access
- Standard 10BASE-T ethernet
- 1 Mbps home network
- Uses existing phone jacks
- LED indicators
- Flash memory for firmware upgrade
- FCC Class B & VCCI Class II certification

### SPECIFICATIONS

#### Standards

- IEEE802.3 10BASE-T Ethernet compliant
- HomePNA 1.1 specifications compliant

#### Data Rates

- Home Networking: 1 Mbps
- Ethernet: 10 Mbps

#### Distances

- Home Networking: 150 meter maximum between the two farthest nodes on the LAN
- Ethernet: 100 meter maximum between two farthest nodes on the LAN

#### Power consumption:

5V DC IN, Less than 4W

#### LEDs

- Power
- HomeNet Link/Activity
- Ethernet Link/Activity
- Error

#### Connectors

- One RJ-11 for connecting with HomePNA device
- One RJ-45 for connecting with a 10BASE-T network

#### Cables

- Home Networking: standard home telephone line
- Ethernet: CAT 3, CAT5 or better UTP

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>