



ECOPOWER BATTERY REPLACEMENT INSTRUCTION MANUAL

FOR MODELS
F6C350-SER-SB
F6C500-SER-SB
F6C650-SER-SB

P74075



belkin.com

Belkin Components USA
800.223.5546
800.2BELKIN

Belkin Components
501 West Walnut Street
Compton • CA • 90220 • USA
Tel: 310.898.1100
Fax: 310.898.1111

Belkin Components, Ltd.
Unit 13 • Gate Lodge Close
Round Spinney • Northampton • Northants
NN3 8RX • United Kingdom
Tel: +44 (0) 1604678300
Fax: +44 (0) 1604678330

Belkin Components, Ltd.
7 Bowen Crescent • West Gosford • NSW 2250 • Australia
Tel: +61 (2) 4372 8600
Fax: +61 (2) 4325 4277

© 2001 Belkin Components. All rights reserved. All trade names are registered trademarks of respective manufacturers listed.

INTRODUCTION

Thank you for participating in the Belkin EcoPower Battery Replacement Program™. Our program ensures that you receive the correct battery for your UPS and your used battery is properly recycled. Save the boxes and packaging material that your replacement battery came in. You will need it to return your used battery.


WARNING

Warning! Before replacing your battery, please review this manual in its entirety. If you have any issues, are technically challenged, have a difficult time following instruction manuals or you cannot program your VCR, STOP IMMEDIATELY, and contact Belkin Technical Support at: (800) 223-5546 ext. 2263 or refer to a qualified computer professional for assistance.

You should have received the following:

1. 1 Battery
2. EcoPower Instruction Manual
3. UPS Call Tag Label

FRONT PANEL

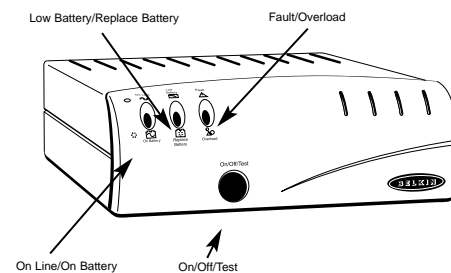

WARRANTY

One-year warranty on battery. Additional warranty programs available. Please check belkin.com for updated information.

OPERATION

Switch On

With the UPS plugged in, press and hold the On/Off/Test button for more than three seconds until the "On Line" LED lights up to switch the UPS on. The UPS will perform self-testing each time it is switched on. Note: The UPS maintains the battery charge when in the off position.

Switch Off

Press and hold the On/Off/Test button for more than three seconds until the "On Line" or "On Battery" LED goes off.

BATTERY REPLACEMENT

Self-Test

Use the self-test to verify both the operation of the UPS and the condition of the battery. In normal utility power, push the "On/Off/Test" button less than two seconds and the UPS performs a self-test function. During the self-test, the UPS operates in "back-up" mode.

Note:


During the self-test, the UPS briefly operates "on battery" mode (the "Replace Battery" LED comes on). If the UPS passes the self-test, it returns to "On Line" operation. The "Replace Battery" LED goes off and the "On Line" LED goes on steady. If the UPS fails the self-test it immediately returns to on-line operation and flashes the "Replace Battery" LED. The loads are not affected. Recharge the battery overnight and perform the self-test again. If the "Replace Battery" LED is still on, the battery will need to be replaced; go to belkin.com.

Silence


In "BACK-UP" mode, push the On/Off/Test button less than three seconds to silence the audible alarm. (The function is void when under condition of "Low Battery".)

Step 1: Turn off your UPS by depressing and holding the On/Off/Test button for more than 3 seconds until the "On Line" or "On Battery" indicator light goes off. You will hear a beep when your unit shuts off.


Step 2: Disconnect EVERY cord from your Belkin UPS.

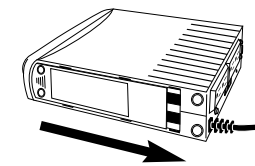

Step 3: Lay down the UPS. Use your thumb to open the battery cover on the bottom of the unit.

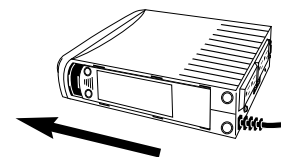


Step 4: Grasp the tab attached to the battery and slide the battery out.

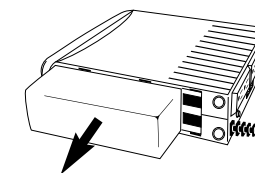

Step 5: Insert the replacement gently into the UPS. Make sure the battery is well connected!

BATTERY REPLACEMENT (CONTINUED)

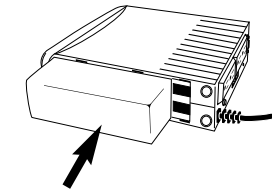

Step 6: Put the battery cover back and slide it into position.

Step 7: Connect your computer cords into the unit.

Step 8: Turn on UPS unit by depressing and holding down the On/Off/Test button.

BATTERY RETURN INSTRUCTIONS

Additional recycling information is provided with your new battery

REFER SERVICING TO QUALIFIED SERVICE PERSONNEL OR CONTACT BELKIN COMPONENTS.

Battery Return Instructions

Step 1: Insert used battery into small box and seal with packaging tape.

Step 2: Place the boxed battery inside the bigger box. Please be sure to cover the smaller box with the packing material. Seal the box with packaging tape.

Step 3: Peel off the return label and place it onto the top of the box.

Step 4: Drop at UPS shipping center or UPS drop-off location.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>