


Thank you for showing your confidence in us by purchasing the BEHRINGER INSTRUMENT/AMP SELECTOR AB100. This high-quality instrument and amp switch is designed for both guitar & bass players who use several amps or instruments. The AB100 allows you to switch between gear noiselessly and instantaneously, adjusting individual volume settings without coloring the sound of your instrument.

1. CONTROLS

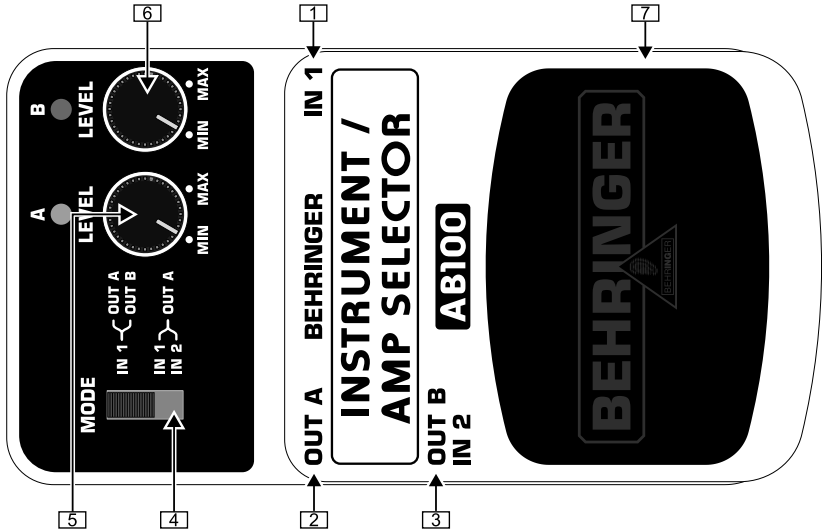

Controls and connections

- 1 **IN 1:** this 1/4" TS jack is the first AB100 input. Plug in an instrument here (guitar, bass, etc.).
- 2 **OUT A:** this 1/4" TS jack is the first AB100 output. Plug in an amp or an effect here.
- 3 **OUT B / IN 2:** this 1/4" TS jack can be used as a second output or a second input, depending on the position of selector 4.
- 4 The **MODE** selector adapts the AB100 to your system: If you play one instrument and two amps, set **MODE** in the upper position to get one input for two outputs. In this case, connector 3 serves as a second output (OUT B). Otherwise, if you play two instruments and one amp, set **MODE** in the lower position to get two inputs for one output. In that case, connector 3 serves as a second input (IN 2).
- 5 Use the **A LEVEL** button to set the volume of OUT A. The output is active when the green LED is lit.
- 6 When **MODE** is in the upper position, use the **B LEVEL** button to set the volume of OUT B. The output is active when the red LED is lit.
- 7 Use the footswitch to noiselessly and instantaneously toggle between two amps (**MODE** selector in the upper position) or two instruments (**MODE** selector in the lower position).

Use the **DC IN** connection to plug in a 9 V power supply (not included).

The **BATTERY COMPARTMENT** is located underneath the pedal cover. To install or replace the 9 V battery, press the hinges with a ballpen and remove the pedal cover. Be careful not to scratch the unit.

The AB100 has no on/off switch. As soon as you insert the jack into the IN connector, the AB100 begins running. When not using the AB100, remove the jack from the IN connector. This extends the life of the battery.

The **SERIAL NUMBER** is located at the bottom of the unit.

2. WARRANTY

For our current warranty terms, please refer to our website at <http://www.behringer.com>.

3. SPECIFICATIONS

In 1	Connector	1/4" TS
	Impedance	500 kΩ
Out A	Connector	1/4" TS
	Impedance	2.2 kΩ
In 2/Out B	Connector	1/4" TS
	Impedance In 2	500 kΩ
	Impedance Out B	2.2 kΩ
Power supply	9 V, 100 mA DC regulated PSU-SB-CN BEHRINGER 220 VAC adaptor China PSU-SB-EU BEHRINGER 230 VAC adaptor Europe PSU-SB-JP BEHRINGER 100 VAC adaptor Japan PSU-SB-SAA BEHRINGER 240 VAC adaptor Australia PSU-SB-UK BEHRINGER 240 VAC adaptor UK PSU-SB-UL BEHRINGER 115 VAC adaptor USA	
Power connector	2 mm DC jack, negative center	
Battery	9 V type 6LR61	
Power consumption	25 mA	
Dimensions (H x W x D)	approx. 54 mm (2 1/8") x 70 mm (2 3/4") x 123 mm (4 4/5")	
Weight	approx. 0.33 kg (0.73 lbs)	

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may therefore differ from those listed or shown.

4. SAFETY INSTRUCTIONS

Do not use near water, or install near heat sources. Use only authorized attachments/accessories. Do not service product yourself. Contact our qualified servicing personnel for servicing or repairs, **especially when power supply cord or plug is damaged.**

No utilizar cerca de agua o instalar cerca de fuentes de calor. Utilice sólo accesorios y aditamentos autorizados. No intente reparar el producto usted mismo. Contacte a nuestro personal técnico cualificado para servicio y reparaciones, **especialmente cuando la fuente o el cable de alimentación estén dañados.**

Не эксплуатировать прибор вблизи от источников воды и тепла. Применять только авторизованные дополнительные устройства. Никогда не ремонтируйте прибор самостоятельно. Ремонт может производить только квалифицированный специализированный персонал, **особенно при повреждениях сетевого провода или сетевой вилки.**

水気の近くや、ヒーターなど熱気のある場所では使用しないでください。正式に認可された付属品のみを使用してください。製品はご自分では決して修理せず、特に電源コードもしくはプラグが損傷した場合には、必ず製品サービスおよびリペアの資格を有した当社の担当員にご相談ください。

不要在靠近水源的地方使用，或在靠近热源的地方安装。只使用经过许可的附件 / 配件。不要自己进行产品维修，**尤其是当电源线或插座损坏的时候**。请联系我们的专业服务人员有关产品维修事宜。

Die deutsche Anleitung ist erhältlich @ www.behringer.com

Manuel francophone en téléchargement sur www.behringer.com

Manual en español disponible en www.behringer.com

Manuali italiani disponibili @ www.behringer.com

Русскоязычное руководство @ www.behringer.com

Polska instrukcja dostępna jest pod adresem @ www.behringer.com

Nederlandse handleiding beschikbaar @ www.behringer.com

Suomenkielinen käyttöohje saatavilla osoitteesta www.behringer.com

Svensk manual finns tillgänglig på www.behringer.com

Dansk vejledning findes på @ www.behringer.com

Manual português disponível @ www.behringer.com

Ελληνικό εγχειρίδιο υπάρχει διαθέσιμο στη διεύθυνση www.behringer.com

日本語版マニュアル @ www.behringer.com

使用说明书可在 www.behringer.com 下载

Technical specifications and appearance subject to change without notice. The information contained herein is correct at the time of printing. The names of companies, institutions or publications pictured or mentioned and their respective logos are registered trademarks of their respective owners. Their use neither constitutes a claim of the trademarks by BEHRINGER® nor affiliation of the trademark owners with BEHRINGER®. BEHRINGER® accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colours and specification may vary slightly from product. Products are sold through our authorised dealers only. Distributors and dealers are not agents of BEHRINGER® and have absolutely no authority to bind BEHRINGER® by any express or implied undertaking or representation. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH. BEHRINGER® is a registered trademark. ALL RIGHTS RESERVED. © 2005 BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchtride, Germany. Tel: +49 2154 9206 0, Fax: +49 2154 9206 4903

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>